

01

# Reciprocating saw series



## DEMOLISHING R-210, R-285




High speed steel teeth- Ideal for furniture demolishing, cutting nail-embedded wood and aluminium frames etc.

No.20105



No.20106



ITEM blade pcs./ctn.  
288(3×12×8)

Blade Length 210 mm : R-210  
285 mm : R-285  
Thickness 1.25 mm

## PRUNING R-210



ITEM blade pcs./ctn.  
288(24×12)

Ideal for pruning trees with great efficiency.

No.20103



Blade Length 210 mm  
Pitch 3.00 mm  
Thickness 0.90 mm



## BAMBOO R-210



ITEM blade pcs./ctn.  
288(24×12)

Ideal for bamboo harvesting without fiber splitting.

No.20104



Blade Length 210 mm  
Pitch 2.15 mm  
Thickness 0.80 mm



## WOODWORKING R-210




ITEM blade pcs./ctn.  
288(24×12)

Sharply ground teeth and round fore-blade are ideal for conventional woodworks.

No.20100



R-blade for scratching

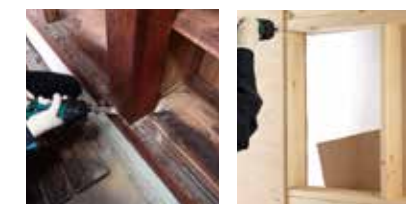

Blade Length 210 mm  
Pitch 3.00 mm  
Thickness 0.90 mm



## WALLBOARD R-90



ITEM blade pcs./ctn.  
288(24×12)

Ideal for pocket cutting on the center of a plywood, laminated wood and plaster board etc.

No.20101



acute angle

Blade Length 90 mm  
Pitch 1.60 mm  
Thickness 0.90 mm



## PVC/PE PIPE R-210



ITEM blade pcs./ctn.  
288(24×12)

Ideal for cutting PVC and PE pipes.

No.20102



Blade Length 210 mm  
Pitch 1.50 mm  
Thickness 0.60 mm



# Authentic Japanese saws



Crafted for  
**Professional  
woodworkers**

## CROSS H-225

Ideal for extremely intricate and precise work on plywood, solid wood etc.



blade No.15019

Blade Length	225 mm	Pitch	1.20 mm
Thickness	0.40 mm	Kerf	0.56 mm

No.15018



## CROSS H-250

Designed for precise and intricate cutting of sawn wood, laminated wood, solid wood etc.



blade No.15007

Blade Length	250 mm	Pitch	1.40 mm
Thickness	0.50 mm	Kerf	0.66 mm

No.15006



## UNIVERSAL H-250

Designed for intricate and precise rip/cross/slant cutting sawn wood, plywood, solid wood, laminated wood etc.



blade No.15270

Blade Length	250 mm	Pitch	1.40 mm
Thickness	0.50 mm	Kerf	0.66 mm

No.15271



## RIP H-250

Graduated sharp teeth and narrow saw set are ideal for cutting along the grain of either soft & hard wood.



blade No.15010

Blade Length	250 mm	Pitch	—
Thickness	0.50 mm	Kerf	0.70 mm




No.15009



## HARDWOOD H-250

Specially designed robust and sharp teeth are ideal for cutting Maple, Ebony, Mahogany, Oak etc.



blade No.15204

Blade Length	250 mm	Pitch	1.75 mm
Thickness	0.50 mm	Kerf	0.68 mm



No.15069



# CROSS H-265

Designed for cross cutting sawn wood, plywood, laminated wood, solid wood etc.



pcs./ctn.  
288(24×12)

blade No.15004

Blade Length	265 mm	Pitch	1.75 mm
Thickness	0.60 mm	Kerf	0.92 mm

No.15003

# CROSS CONVEX H-265

Ideal for smooth and fast-cross cutting conventional sawn wood, plywood, laminated wood and solid wood etc.



pcs./ctn.  
72(12×6)

blade No.15063

Blade Length	265 mm	Pitch	1.75 mm
Thickness	0.60 mm	Kerf	0.88 mm

Convex saw blade - ideal for smooth fast square cut and cutting out straight bottom line of joinery.

No.15073

# UNIVERSAL H-265

Designed for rip/cross/slant cutting the sawn wood, plywood, solid wood, laminated wood etc.



pcs./ctn.  
288(24×12)

blade No.15076

Blade Length	265 mm	Pitch	1.75 mm
Thickness	0.60 mm	Kerf	0.92 mm

No.15075

# UNIVERSAL H-300

Specially designed teeth for cross/rip/slant cutting of solid wood, general sawn wood, plywood, laminated wood etc.



pcs./ctn.  
72(12×6)

blade No.15012

Blade Length	300 mm	Pitch	2.15 mm
Thickness	0.70 mm	Kerf	1.07 mm

No.15011

# RIP H-300

Graduated sharp teeth and rigid saw blade are ideal for cutting along the grain of soft & hard wood.



pcs./ctn.  
144(24×6)

Blade Length	300 mm	Pitch	—
Thickness	0.66 mm	Kerf	0.93 mm

No.15013

# HANDY UTILITY H-200

Specially designed compact saw - ideal for conventional wood works in confined spaces.



pcs./ctn.  
288(24×12)

blade No.15087

Blade Length	200 mm	Pitch	1.75 mm
Thickness	0.50 mm	Kerf	0.70 mm

No.15086

Compact size

Ergonomic grip design

# WAISTERN 180 WOOD

Ideal for cutting Dimensional lumbers, Plywoods,Blockboards etc.



pcs./ctn.  
36(6×6)

blade No.15211

Blade Length	180 mm	Pitch	1.75 mm
Thickness	0.60 mm	Kerf	0.92 mm

No.15210

Panel piercing fore-blade

# WAISTERN 180 METAL

Ideal for cutting Iron gutters, Iron pipes, Copper, Aluminium Lead, Brass pipes and frames etc.



pcs./ctn.  
288(24×12)

blade No.15213

Blade Length	175 mm	Pitch	1.41 mm
Thickness	0.70 mm	Kerf	1.00 mm

No.15212

Back blade can be used for deburring contour line.

Iron Gutters

# WAISTERN 180 KITCHEN WALL PANEL

Ideal for cutting Kitchen wall panels, PVC, PE plastic pipes, Dry walls etc.



pcs./ctn.  
36(6×6)

blade No.15215

Blade Length	172 mm	Pitch	1.50 mm
Thickness	0.60 mm	Kerf	0.90 mm

No.15214

Saws can be unsheathed by one hand.

Waist saw with clip-on loop with great portability.



03

## Utility saw series

### UTILITY H-240

Ideal for cutting PVC & PE pipes, plastic and lead tubes etc.



No.08006

プラ	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 72(6×12)
Plastic	Pipe	Impulse Hardening	Hook fit	blade	600(60×10)
				No.08015	
				blade	
				No.08015	
				blade	
				No.08015	
				blade	
				No.08015	
				blade	
				No.08015	

### UTILITY H-240 TAPERED

Ideal for cutting PVC & PE pipes, plastic and lead tubes etc.



No.08043

プラ	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 72(6×12)
Plastic	Pipe	Impulse Hardening	Hook fit	blade	600(60×10)
				No.08037	
				blade	
				No.08037	
				blade	
				No.08037	
				blade	
				No.08037	
				blade	
				No.08037	

Tapered fore - blade allows access to more confined spaces than traditional hacksaws.



### UTILITY FLUSH H-240

Ideal for flush cutting PVC, polyethylene pipe and plastic.



No.08049



プラ	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 288(24×12)
Plastic	Pipe	Impulse Hardening	Hook fit	blade	
				No.08049	
				blade	
				No.08049	
				blade	
				No.08049	
				blade	
				No.08049	
				blade	
				No.08049	

Blade Length	225 mm	Pitch	1.50 mm
Thickness	0.60 mm	Kerf	0.60 mm



Ideal for flush cutting protruding pipes, dowels, wedges etc. without marring cutting surface.

### PAIMAN H-240

Designed for cutting aluminium, bronze, brass and lead tube, PVC, plastic pipe etc.



No.08010



軽金	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 120(10×12)
Soft metal	Pipe	Impulse Hardening	Hook fit	blade	300(60×5)
				No.08012	
				blade	
				No.08012	
				blade	
				No.08012	
				blade	
				No.08012	
				blade	
				No.08012	

Blade Length	225 mm	Pitch	1.41 mm
Thickness	0.60 mm	Kerf	0.95 mm



### HSS PAIMAN H-240

Designed for cutting iron, aluminium, bronze, brass and lead tube etc.



No.08104



金属	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 120(10×12)
Metal	Pipe	Impulse Hardening	Hook fit	blade	288(24×12)
				No.08105	
				blade	
				No.08105	
				blade	
				No.08105	
				blade	
				No.08105	
				blade	
				No.08105	

Blade Length	225 mm	Pitch	1.41 mm
Thickness	0.70 mm	Kerf	1.00 mm



durable HSS teeth

Tough alloy blade with HSS.(High-speed steel) teeth is ideal for cutting iron, aluminium, bronze etc. in confined spaces.



### UTILITY H-300

Ideal for cutting PVC & PE pipes, plastic, lead tube and siding board etc.



No.08031



プラ	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 72(12×6)
Plastic	Pipe	Impulse Hardening	Hook fit	blade	240(24×10)
				No.08032	
				blade	
				No.08032	
				blade	
				No.08032	
				blade	
				No.08032	
				blade	
				No.08032	

Blade Length	300 mm	Pitch	1.50 mm
Thickness	0.66 mm	Kerf	1.00 mm



### SIDING H-120

Designed for cutting plaster board and siding board etc.




No.08112



石膏	Pipe	HAND IMPULSE	替	ITEM saw blade	pcs./ctn. 288(24×12)
Dry wall	Pipe	Impulse Hardening	Hook fit	blade	
				No.08113	
				blade	
				No.08113	
				blade	
				No.08113	
				blade	
				No.08113	
				blade	
				No.08113	

Blade Length	120 mm	Pitch	1.50 mm
Thickness	0.60 mm	Kerf	—



cutting siding board



04

# Dozuki backsaw series

Blade thickness : 0.3 mm

## DOZUKI H-150

Extra fine saw blade, ideal for intricate and precise woodworking (crafting musical instrument, dovetails etc).

Sawn wood	Cross cut	Precise cut	Impulse Hardening	Hook fit	ITEM saw blade	pcs./ctn. 72(12×6) 240(24×10)
blade No.07013			Blade Length 150 mm	Pitch 1.00 mm		
			Thickness 0.30 mm	Kerf 0.40 mm		

No.07012

maximum cutting depth  
38mm

## DOZUKI H-240

Ideal for extremely intricate and precise works, such as Dovetail, Tenon joint making.

Sawn wood	Cross cut	Precise cut	Impulse Hardening	Hook fit	ITEM saw blade	pcs./ctn. 72(12×6) 360(36×10)
blade No.07030			Blade Length 240 mm	Pitch 1.00 mm		
			Thickness 0.30 mm	Kerf 0.40 mm		

No.07029

maximum cutting depth  
50mm

## DOZUKI WIDE H-240

Ideal for extremely intricate and precise work, such as Dovetail, Tenon joint making.

Sawn wood	Cross cut	Precise cut	Impulse Hardening	Hook fit	ITEM saw blade	pcs./ctn. 72(12×6) 360(36×10)
blade No.07032			Blade Length 240 mm	Pitch 1.00 mm		
			Thickness 0.30 mm	Kerf 0.40 mm		

No.07031

maximum cutting depth  
60mm

## PANEL PIERCING H-150

Ideal for intricate and precise woodwork (crafting musical instrument, dovetails etc).

Sawn wood	Cross cut	Precise cut	Pocket cut	Impulse Hardening	Hook fit	ITEM saw blade	pcs./ctn. 72(12×6) 240(24×10)
blade No.07011				Blade Length 150 mm	Pitch 1.41 mm		
				Thickness 0.30 mm	Kerf 0.49 mm		





No.07010

maximum cutting depth  
38mm

Special hook tooth for cutting a slot (pocket cutting) on the center of a veneer, laminated board.

## BAMBOO H-150

Ideal for crafting intricate and precise bamboo arts.

				ITEM	pcs./ctn.	
Bamboo	Precise cut	Impulse Hardening	Hook fit	saw blade	72(12×6)	
					240(24×10)	
blade No.07015		Blade Length		150 mm	Pitch	1.00 mm
		Thickness		0.30 mm	Kerf	0.46 mm

No.07014

maximum cutting depth  
38mm

## PANEL PIERCING H-240

Ideal for intricate and precise woodwork (crafting musical instrument, dovetails etc).

Sawn wood	Cross cut	Precise cut	Pocket cut	Impulse Hardening	Hook fit	ITEM saw blade	pcs./ctn. 72(12×6) 360(36×10)
blade No.07027				Blade Length 240 mm	Pitch 1.50 mm		
				Thickness 0.30 mm	Kerf 0.51 mm		






No.07026

maximum cutting depth  
50mm

Special hook tooth for cutting a slot (pocket cutting) on the center of a veneer, laminated board.

## PANEL WIDE H-240

Ideal for extremely intricate and precise work, such as Dovetail, Tenon joint making.






					ITEM	pcs./ctn.
Sawn wood	Cross cut	Precise cut	Impulse Hardening	Hook fit	saw blade	72(12×6)
						360(36×10)
blade No.07024						
			Blade Length	240 mm	Pitch	1.50 mm
			Thickness	0.30 mm	Kerf	0.51 mm

No.07023

maximum cutting depth  
50mm

## PANEL NARROW H-240

Long and narrow saw blade - ideal for intricate and precise works on general wood materials.

					ITEM	pcs./ctn.
Sawn wood	Cross cut	Precise cut	Impulse Hardening	Hook fit	blade	360(36×10)
			Blade Length	240 mm	Pitch	1.50 mm
			Thickness	0.30 mm	Kerf	0.49 mm

No.07021

maximum cutting depth  
40mm

# 05 TUCK IN folding saw series

Ergonomic & Practical design

Aluminium Die Casting

Tough



## TUCK IN COARSE P-210

Ideal for orchard, vineyard pruning and cutting sawn wood, plywood etc.

No.18001



Blade Length 210 mm Pitch 3.00 mm  
Thickness 0.90 mm Kerf 1.18 mm



## TUCK IN FINE P-210

Developed for incredible cutting performance on sawn wood, plywood, laminated wood and pruning trees etc.

No.18002



Blade Length 210 mm Pitch 2.15 mm  
Thickness 0.80 mm Kerf 1.08 mm




## TUCK IN COARSE P-240

Ideal for pruning deciduous fruit trees and cutting sawn wood, plywood, laminated wood etc.

No.18003



Blade Length 240 mm Pitch 3.20 mm  
Thickness 1.00 mm Kerf 1.28 mm




## TUCK IN CARPENTRY P-240

Ideal for precise wood works on sawn wood, plywood, laminated wood, composite panel etc.

No.18004



Blade Length 240 mm Pitch 1.75 mm  
Thickness 0.70 mm Kerf 0.95 mm




## BOLT SET for TUCK IN series


No.18990



Blade Detachment:

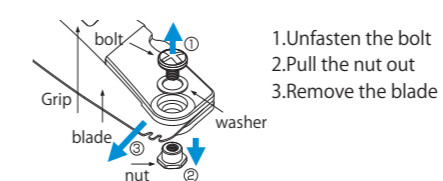

Blade Attachment:

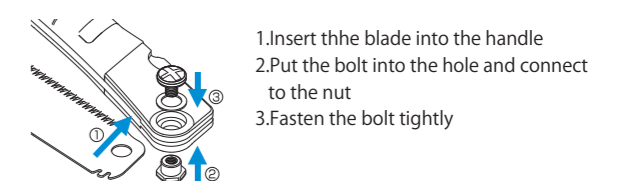

1. Insert the blade into the handle  
2. Put the bolt into the hole and connect to the nut  
3. Fasten the bolt tightly

# 06 Pruning saw series

*from the Origin of Samurai Katana Sword*

## PRUNING H-240

Sharply ground fine teeth are ideal for pruning relatively soft trees like pears and apples etc.



No.15272



blade No.15273



Blade Length 240 mm Pitch 2.00 mm  
Thickness 0.70 mm Kerf 0.90 mm



Ni-P Plated



pear

apple

## PRUNING H-210

Coarse razor sharp teeth are specially designed for pruning relatively hard fruit trees like orange, plum and olive etc.



No.15274



blade No.15275



Blade Length 210 mm Pitch 3.00 mm  
Thickness 0.70 mm Kerf 0.90 mm



Ni-P Plated



tangerine

plum

jujube

olive

## FS-210 P3.0

Ideal for pruning Apple, Olive, Plum and other fruit trees.



blade No.52422



No.52421




Impulse Hardening



Screw fit



ITEM saw blade



pcs./ctn. 36(6×6)  
288(24×12)

Blade Length 210 mm  
Thickness 0.70 mm


Pitch 3.00 mm




Ni-P Plated

## FS-240 P2.4

Ideal for pruning Apple, Pear and other fruit trees.



blade No.52424



No.52423




Impulse Hardening



Screw fit



ITEM saw blade



pcs./ctn. 36(6×6)  
288(24×12)

Blade Length 240 mm  
Thickness 0.70 mm


Pitch 2.40 mm




Ni-P Plated

## FS-270 P2.4

Ideal for pruning Apple, Peach and other fruit trees.



blade No.52426



No.52425




Impulse Hardening



Screw fit



ITEM saw blade



pcs./ctn. 36(6×6)  
288(24×12)

Blade Length 270 mm  
Thickness 0.70 mm

Pitch 2.40 mm




Ni-P Plated

Tech-Movie



## Features

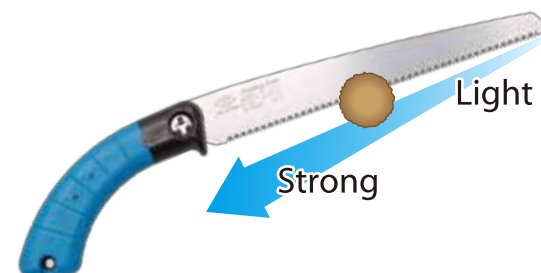

Stroking rhythmically and adding force while pulling can largely enhance sawing efficiency.



Clip-on belt loop: easy to remove.



Universal Sheath: For right or left handers.

Handle & Scabbard

STRAIGHT H-190 Wood SB No.07995	Fitting group A
STRAIGHT H-270 Wood LB No.07990	B
STRAIGHT H-270 Wood No.15994	C
STRAIGHT H-300 Wood No.15990	D
STRAIGHT H-300 Red No.15952	D
STRAIGHT H-300 Blue No.15953	D
STRAIGHT H-300 Black No.15971	D
STRAIGHT H-300 Puff No.15294	D
PISTOL H-146 LH No.15996	D
STRAIGHT H-240 Wood LH No.08990	E
STRAIGHT H-240 Wood SH No.08992	E
PISTOL H-126 Yellow No.08993	E
PISTOL H-126 Blue No.08996	E



PISTOL H-126 Red No.08991	Fitting group E
PISTOL H-146 SH No.08994	F
STRAIGHT H-330 Wood No.15991	G
STRAIGHT H-330 Orange No.15973	G
PISTOL H-150 Wood No.15044	H
FOLDING H-210 No.15032	I
FOLDING H-240 No.15033	J
FOLDING H-270 No.15034	K
SCABBARD H-126 No.08998	
SCABBARD H-150 No.15045	

Combination

		Fitting group							
		A	B	C	D, E	D, E	F, G	H	I, J, K
Fitting group	Z-Saw Handle								
	Z-Saw Blade								
A	DOZUKI H-150 PANEL PIERCING H-150 BAMBOO H-150	◎							
B	DOZUKI H-240 DOZUKI WIDE H-240 PANEL NARROW H-240 PANEL WIDE H-240 PANEL PIERCING H-240		◎						
C	CROSS H-225			◎	○	○			
D	CROSS H-250 RIP H-250 UNIVERSAL H-250 HARDWOOD H-250 CROSS H-265 UNIVERSAL H-265 CROSS CONVEX H-265 RIP H-300 BAMBOO H-270			○	◎	◎	○	○	
E	UTILITY H-180 TAPERED *1 SIDING H-120 *1 UTILITY H-240 *1 UTILITY H-240 TAPERED *1 UTILITY FLUSH H-240 *1 PAIMAN H-240 *1 HSS PAIMAN H-240 *1 PRUNING H-240 *1 PRUNING H-210 *1			○	◎	◎	○	○	
F	UTILITY H-300 UNIVERSAL H-300 CROSS CONVEX H-300 FRAMING H-273 *2 FRAMING H-333				○	○	◎	◎	
K	ORICCO H-210, H-240, H-270				○	○	○	○	◎

\*1 : Attachable to SCABBARD H-126. \*2 : Attachable to SCABBARD H-150.

⚠ Since the saw teeth are very sharp, we recommend that you wear gloves or wrap the blade with a rag when replacing the blade.

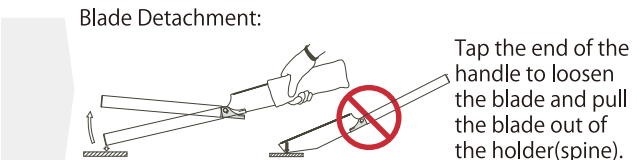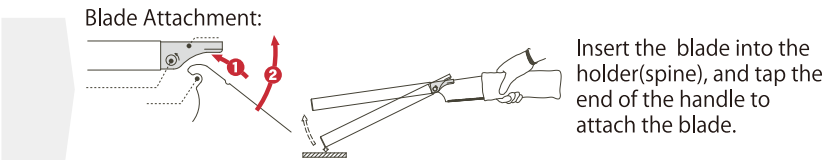

# 07 Z-Saw D.I.Y. Series




## SAW GUIDE SET



ITEM pcs./ctn.  
guide set 12

Designed to be used with Universal S-265 to cut work pieces at 90°, right & left 45° horizontally and vertically back inclined 45° etc.

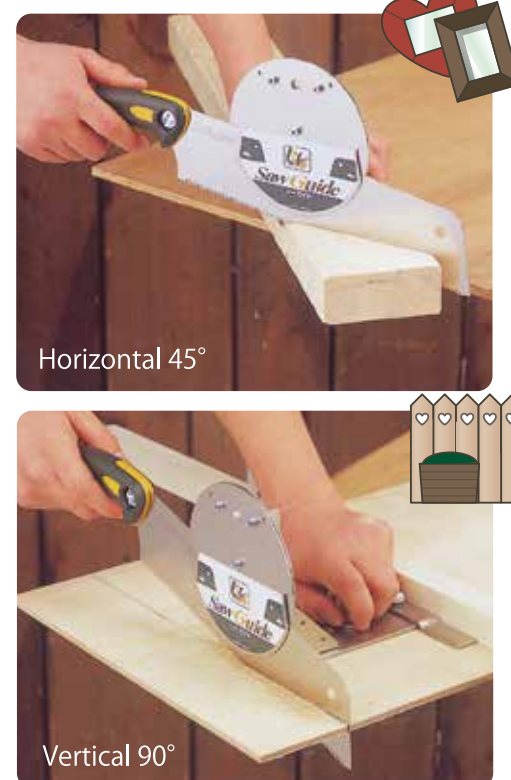

## UNIVERSAL S-265

Ideal for rip / cross / slant cutting sawn wood, plywood, laminated wood, veneer etc.



pcs./ctn.  
72(6×12)  
288(24×12)

blade No.30003



Blade Length  
Thickness

265 mm  
0.60 mm

Pitch  
Kerf

1.75 mm  
0.92 mm




Best to be used with Saw Guide and Saw Guide F.

## SAW GUIDE-F SET



ITEM pcs./ctn.  
guide set 12

Designed to be used with Universal S-265 to cut work pieces at any angle between right 45° to left 45° either horizontally or vertically.

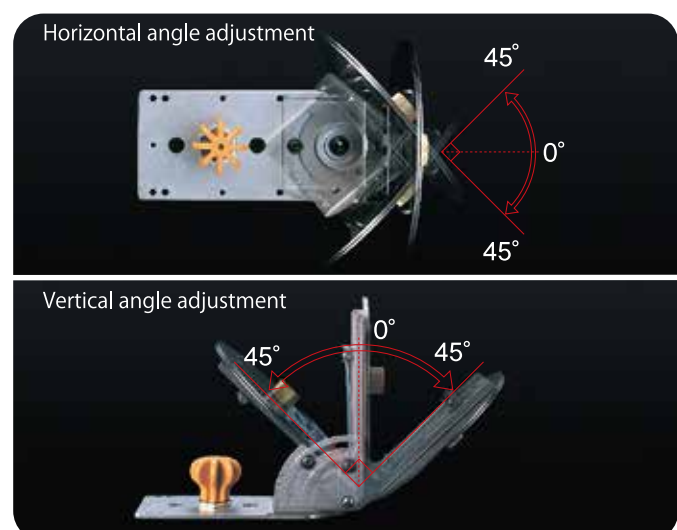

## SAW GUIDE GAUGE



ITEM pcs./ctn.  
gauge set 12

Designed for Saw Guide angle adjustment



# SAW GUIDE MINI



DIY

ITEM pcs./ctn.  
guide set 12

Designed to be used with Universal S-175 to cut work pieces at 90° and right&left 45° by attaching 45° angle attachment.



No.30104



45 degree angle attachment :  
To cut wood at 45°



Parallel sliding holder :  
To slide cut wide board



Dummy blade (0.50 mm) :  
To adjust the guide position against cutting line on the work piece



UNIVERSAL S-175  
(Handle color : Green)

# FLUSH S-145



Sawn wood



DIY



Hard Impulse



Screw fit

ITEM pcs./ctn.  
saw blade 72(12×6)  
288(24×12)

Extra fine teeth without setting are ideal for trimming dowel and tenon etc.



No.30024



Ni-P Plated



No set



No.30023



Blade Length 150 mm Pitch 1.20 mm Thickness 0.40 mm Kerf 0.40 mm

# DOUBLE EDGE S-250



Sawn wood



Rip cut



Cross cut



Hard Impulse



Screw fit

ITEM pcs./ctn.  
saw blade 36(6×6)  
144(24×6)

Double edged blade with rip and cross cutting teeth in each side is ideal for cutting sawn wood, plywood and laminated wood in all direction.



No.30007



No.30210



Clear coated

Blade Length 250 mm Pitch 1.40 mm Thickness 0.50 mm Kerf 0.70 mm (CROSS side)

# UNIVERSAL S-175



Sawn wood



Universal cut



DIY



Hard Impulse



Screw fit

ITEM pcs./ctn.  
saw blade 72(12×6)  
288(24×12)

Designed for rip / cross / slant cutting of sawn wood, plywood, solid wood, laminated wood etc.



blade No.30018



No.30017



Best to be used with Saw Guide Mini.



Blade Length 180 mm Pitch 1.40 mm Thickness 0.50 mm Kerf 0.66 mm

# PRUNING S-175



Pruning



DIY



Hard Impulse



Screw fit

ITEM pcs./ctn.  
saw blade 72(12×6)  
288(24×12)

Compact blade with extra fine teeth is ideal for home gardening.



blade No.30020



No.30019



Blade Length 180 mm Pitch 2.15 mm Thickness 0.50 mm Kerf 0.66 mm

# BAMBOO & PLASTICS S-175



Bamboo



Plastic



Pipe



DIY



Hard Impulse



Screw fit

ITEM pcs./ctn.  
saw blade 72(12×6)  
288(24×12)

Compact body with specially ground teeth are recommended for cutting PVC / PE pipes, acrylic resin plates, bamboo etc.



blade No.30022



No.30021



Blade Length 180 mm Pitch 1.50 mm Thickness 0.50 mm Kerf 0.80 mm



## DRYWALL S-90

Ideal for pocket cutting on dry wall, plaster board etc.

						ITEM saw blade	pcs./ctn. 72(12×6) 288(24×12)
--	--	--	--	--	--	----------------------	-------------------------------------

blade No.30206



Blade Length 90 mm Pitch 1.60 mm Thickness 0.90 mm Kerf 1.36 mm

No.30025



Symmetrically ground teeth for either push or pull cutting, can push to cut dry wall to avoid burring on the surface.

## COMPASS Series

Designed for cutting tight curves, circles, on the sawn wood, plywood, laminated wood, etc.

						ITEM saw blade	pcs./ctn. 72(12×6) 288(24×12)
--	--	--	--	--	--	----------------------	-------------------------------------

blade No.30207



No.30027



No.30028



No.30029



blade No.30209



## COMPASS S-80


Blade Length 80 mm Pitch 1.60 mm Thickness 0.90 mm Kerf 1.30 mm

## COMPASS S-150

Blade Length 150 mm Pitch 1.60 mm Thickness 0.90 mm Kerf 1.30 mm

## COMPASS S-210

Blade Length 210 mm Pitch 1.60 mm Thickness 0.90 mm Kerf 1.30 mm



For securing clear sight of cutting line, the saw blade could be attached in reverse to the handle.

normal

## Company Profile

NAME : Okada Hardware Mfg. Co., Ltd.

ADDRESS : 561 Omura Miki Hyogo, JAPAN  
Postal Code : 673-0404

TEL : 81-794-83-1111 FAX : 81-794-83-5111

Establishment: April 27th 1943

CAPITAL : ¥ 30,000,000

PRODUCTS : Handsaws, Reciprocating saw blades, Hole saws, mason & metal chisels etc.

URL : <http://www.z-saw.co.jp> E-MAIL : [sales1@z-saw.co.jp](mailto:sales1@z-saw.co.jp)

QUALITY MANAGEMENT SYSTEM : ISO9001:2008



JQA-QMA14387



CM009

ISO9001:2008

MANUFACTURING EQUIPMENTS : Own made saw manufacturing machines, NC (Numerically Controlled)-Lathes, NC-Milling machines, Forging machines, Welding machines, Heat treating equipments, Inspecting equipments, laser machines.

SALES NETWORK : 58 distributors, covering the domestic and the overseas markets through the sole agent "Z-HANBAI Co., Ltd."

